


MP-2BM Q-SERVO

4-Axis Servo Motor Type Packing Machine



Adjustable Bag Former

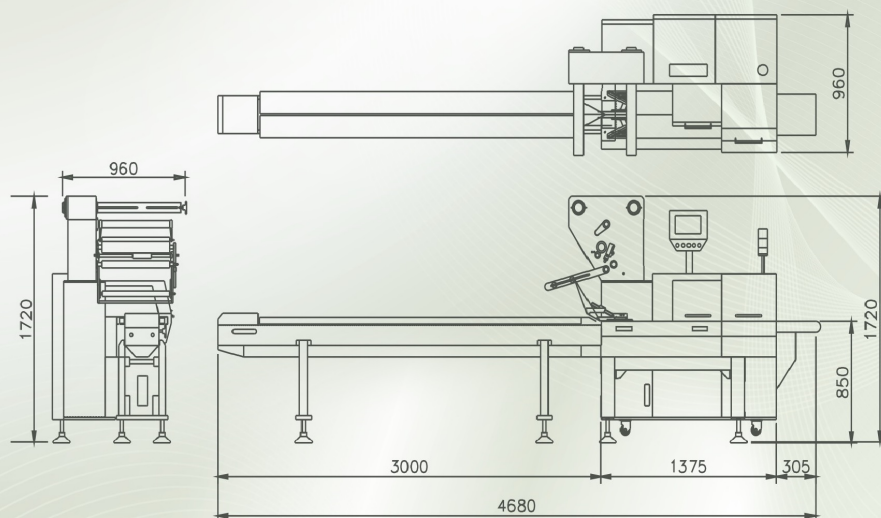

Auto Feeder



Box-motion End Sealer



Double Film Holder



Heavy-duty Servo System



Safety Cover



HMI



SUS304

OPTIONAL ACCESSORIES:

- ▶ Infeed conveyor family with a wide range of product specific functionalities
- ▶ Automatic product feeder & loader for high speed purpose
- ▶ Excess sealing areas trimming and trash collecting device
- ▶ Liquid pumping unit for napkins wetting purpose
- ▶ Stainless standard applied machine shell
- ▶ No product, no bag function
- ▶ Human machine interface
- ▶ Easy tear off cut device
- ▶ Automatic film splicer
- ▶ Labeling machine
- ▶ Perforator device
- ▶ Out-put collector
- ▶ Photocell sensor
- ▶ Gas flusher
- ▶ Date coder

MP-2BM Q-SERVO

4-Axis Servo Motor Type Packing Machine

FEATURES

Machine Design:

- Cantilever build/ Heavy steel mainframe and housing, with integrated electrical cabinet. Robust steel frame servo-machine for multi-shift operation with high modularity
- Strict division between product/package material handling and drive elements.
- Minimum of mechanical parts and universality of the same parts where possible.
- Left and right hand version available.
- Box-motion type end sealer, featuring easy maintenance and hermetic sealing

Package Style:

- Taut or slack pillow pack with or without gusset fold.
- End fins: grooved longitudinally or transversely, with strait or zigzag cut.
- On request with print coding, carton insert, label or coupon, tear strip, tear notches and other easy opening features.

Packaging Material:

- Printed, print registered or non-printed, heat sealable or cold sealable monolayer or laminated film.

Smart Operation:

- The touch screen of the HMI panel is integrated on the top of the machine. As option also an adjustable panel mounted on a swivel arm is available. Parameter entry, errors, alarms, production statistics are all displayed on the HMI
- Smart functions: No product no pack/ Misplaced item skip/ Quick eye-mark locating/ Speedy product change over

SPECIFICATIONS

Packing type:	Pillow type (Center seal type)
Film Width	Small: 380mm Medium: 580mm Large: >780mm
Product Size	Small: 50~150mm/L max. 130mm/W max. 50mm/H Medium: 150~400mm/L max. 230mm/W max. 80mm/H Large: >400mm/L max. 330mm/W max. 120mm/H
Speed & Output	(1)60~100packs/min (2)100~160packs/min(3)>160packs/min Product and film characteristics may affect machine output.
Cut Off Length	70mm~700mm(Standard range)
Power & Connection	Voltage: 3-phase, 220V/380V/415V, 50/60Hz Air: 6 bar; 0.03~1m ³ /h for defect package reject and/or gusset folder
Machine Size & Weight	4700mm/L 1050mm/W 1670mm/H Approx.850kg

*Remark: It may be designed & customized individually by KEED if the size of packing content is beyond the above size range

MAIN APPLICATIONS



Breads




Cakes



Chocolates



Traycookies

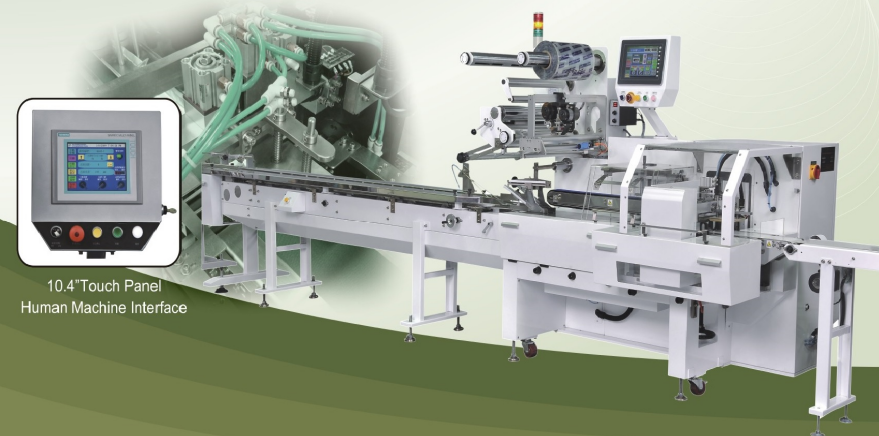

10.4" Touch Panel
Human Machine Interface



Keed Automatic Package Machinery Co., Ltd.

NO.331-6, Lane106, Sec.7 Yen-ping North Road Taipei Taiwan
TEL: +886-2-28105288 EXT:26/27 FAX: +886-2-28102226 E-mail:service@keed.com.tw
Your Trustable Automation & Packaging Solution Provider